


CVC - LDIND01



Product features:

- Slim and light weight.
- Support power & signal dual back-up.
- Fully automatic corner protection.
- True-to-life image presentation.

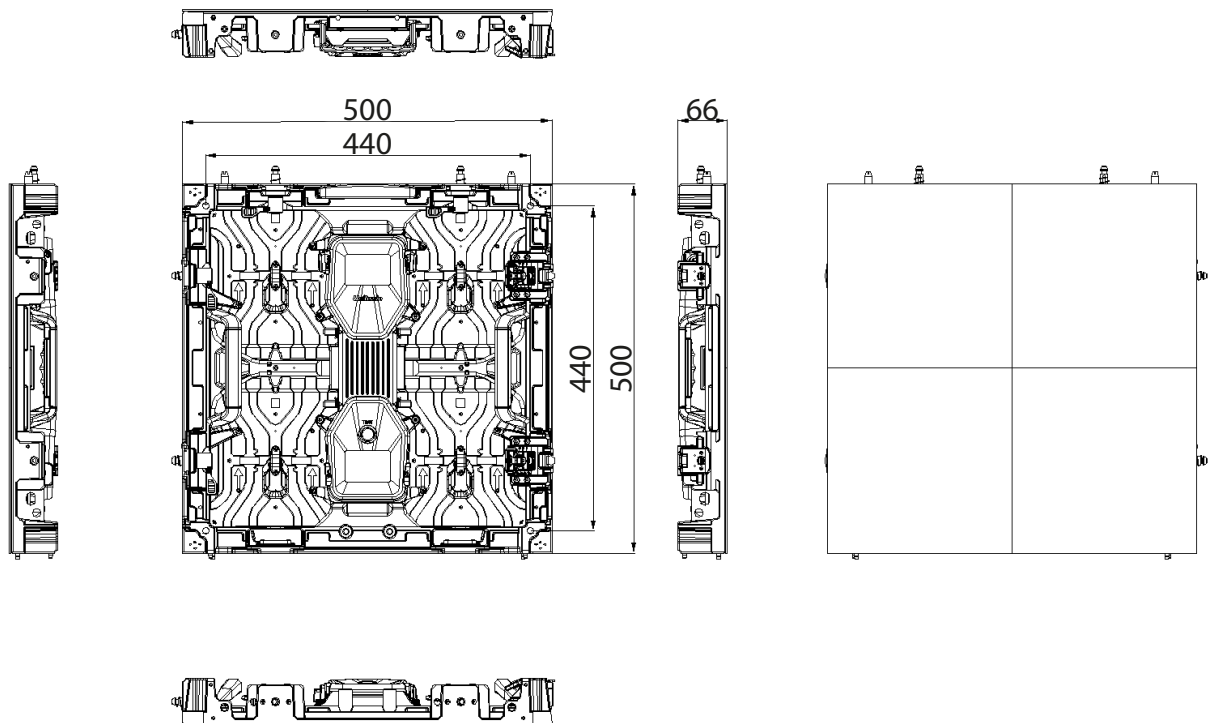

Main Technical Specifications:

Parameter	CVC - LDIND01
Pixel Pitch	1.9mm
LED Type	3-in-1 Black SMD
Brightness	800 cd/m ²
Pixel Density	262,144 pixels/m ²
Pixels Per Panel	256×256 pixels
Module Size	W250mm×H250mm
Panel Size	W500mm×H500mm×D66mm
Weight	7.2 kg/panel
Maintenance	Front & Rear
Ingress Protection	IP 30
Curve	(Convex) -7.5°~+7.5°(Concave)
Aspect Ratio	1:1
Panel Area	0.25 m ²
Recommended Viewing Distance	≥1.9m
Environment	Indoor
Material	Die-cast Aluminum
Calibration	Support Brightness and Chroma
Brightness Control	Manual/Automatic
Color Temperature	2,000K~9,300K Adjustable
Horizontal Viewing Angle	150°
Vertical Viewing Angle	150°
Contrast Ratio	4,000:1
Input Power <Max>	145 W/panel
Input Power <Typical>	50 W/panel
Input Voltage	200~240 VAC
Processing Depth	14 bits

Scan Method	1/32
Refresh Rate	3,840@60Hz
Video Frame Rate	50/60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~80% RH
Storage Temperature/Humidity	-20°C~+50°C/10~60% RH
Standard Mounting Configuration	Hanging, Stacking

Note:

1. The image of the product above is for illustration only and may differ from the actual product (including but not limited to appearance, color, size, etc.).
2. The parameters are reference values, part of which is obtained under a specific test environment, there may be slight differences in actual use due to differences in product batch, configuration, software versions, use conditions, and environmental factors.