


CVC - LDIND1.5



SERIES PRODUCT SPECIFICATION

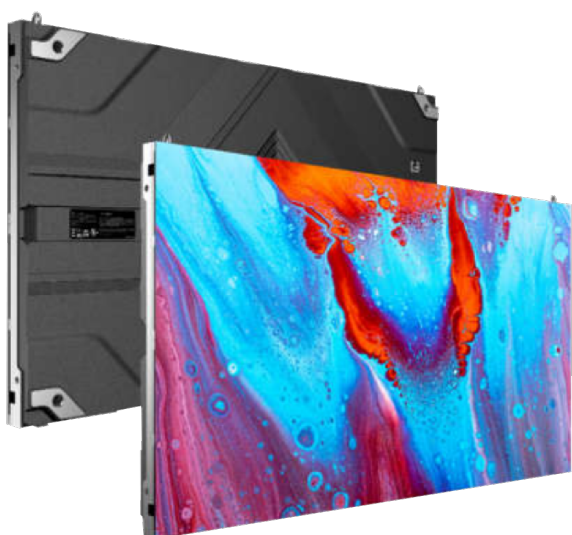

CVC - LDIND1.5 Front Maintenance Display

Product features:

- EBL+ Technology: Brings a higher contrast ratio of 10000:1, displaying more details;
- Ultra Energy Saving: Common Cathode, Fully Flip Chip LED and Advanced Energy Management System;
- Fully Front Maintenance, support Wall Mounting, no extra space needed behind screen.
- Creative design optional, support curving, corner and half-size panel.

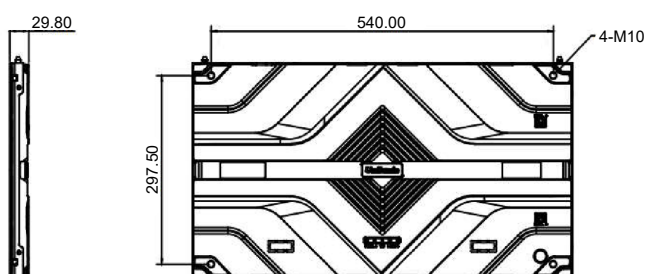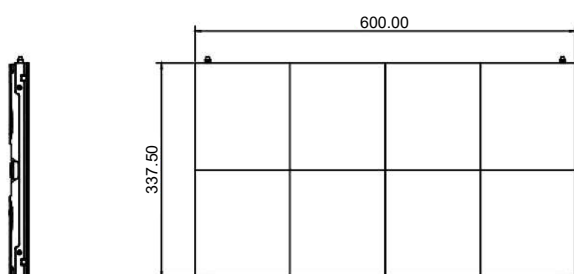

SPECIFICATION PARAMETERS:

Specification		CVC - LDIND1.5	
Basic Parameter	Pixel Pitch	1.5625	
	LED Type	Fully Flip Chip COB	
	Pixel Density	409,600 pixels/m ²	
	Pixel Per Panel	384x216 pixels	
	Module Size	150mm × 168.75mm	
	Panel Size	600mm × 337.5mm × 29.8mm	
	Weight	4 kg/Panel	
	Maintenance	Front	
	Ingress Protection	Rear IP50	
	Curve	0° (Flat)	
	Panel Diagonal	27"	
	Aspect Ratio	16:9	
	Panel Area	0.2025m ²	
	Recommended Viewing Distance	≥1.5m	
	Environment	Indoor	
Display Parameter	Material	Die-Cast Aluminium	
	Calibration	Support Brightness and Chroma	
	Brightness Control	Manual/Automatic	
	Control Temperature	2,000K-9,500K Adjustable	
	Viewing Angle	0°~180°	
	Brightness	600cd/m ²	800cd/m ²
	Contrast Ratio	10000: 1	12000: 1
	Input Power <Max>	≤40 W/panel; ≤200W/m ²	≤50W/panel; ≤250W/m ²
	Input Power <Typical>	≤20W/panel; 100W/m ²	≤25W/panel; ≤125W/m ²
	Input Voltage	100~240 V (50&60Hz)	
	Processing Depth	19 bits	

Display Parameter

Refresh Rate	3840Hz
Video Frame Rate	50/60Hz
Input Power Frequency	50&60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/ 10~80% RH
Storage Temperature/Humidity	-40°C~+60°C/10~90% RH
Power Status	Diagnostic LEDs
Standard Mounting Configuration	Fixed
Certification	ETL/FCC/CE/CB/RoHS2.0/CCC/CQC/Low Blue Light

Note:

1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
2. The specification parameters are reference values. Part of the data comes from Comunicación Visual Canarias's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
3. Different configurations can achieve different refresh rates.